


REVISION RECORD				
REV.	EO NO.	DESCRIPTION	DATE	APPVD.
01	06-009-MMC	Released For Limited Production	1/9/06	REF

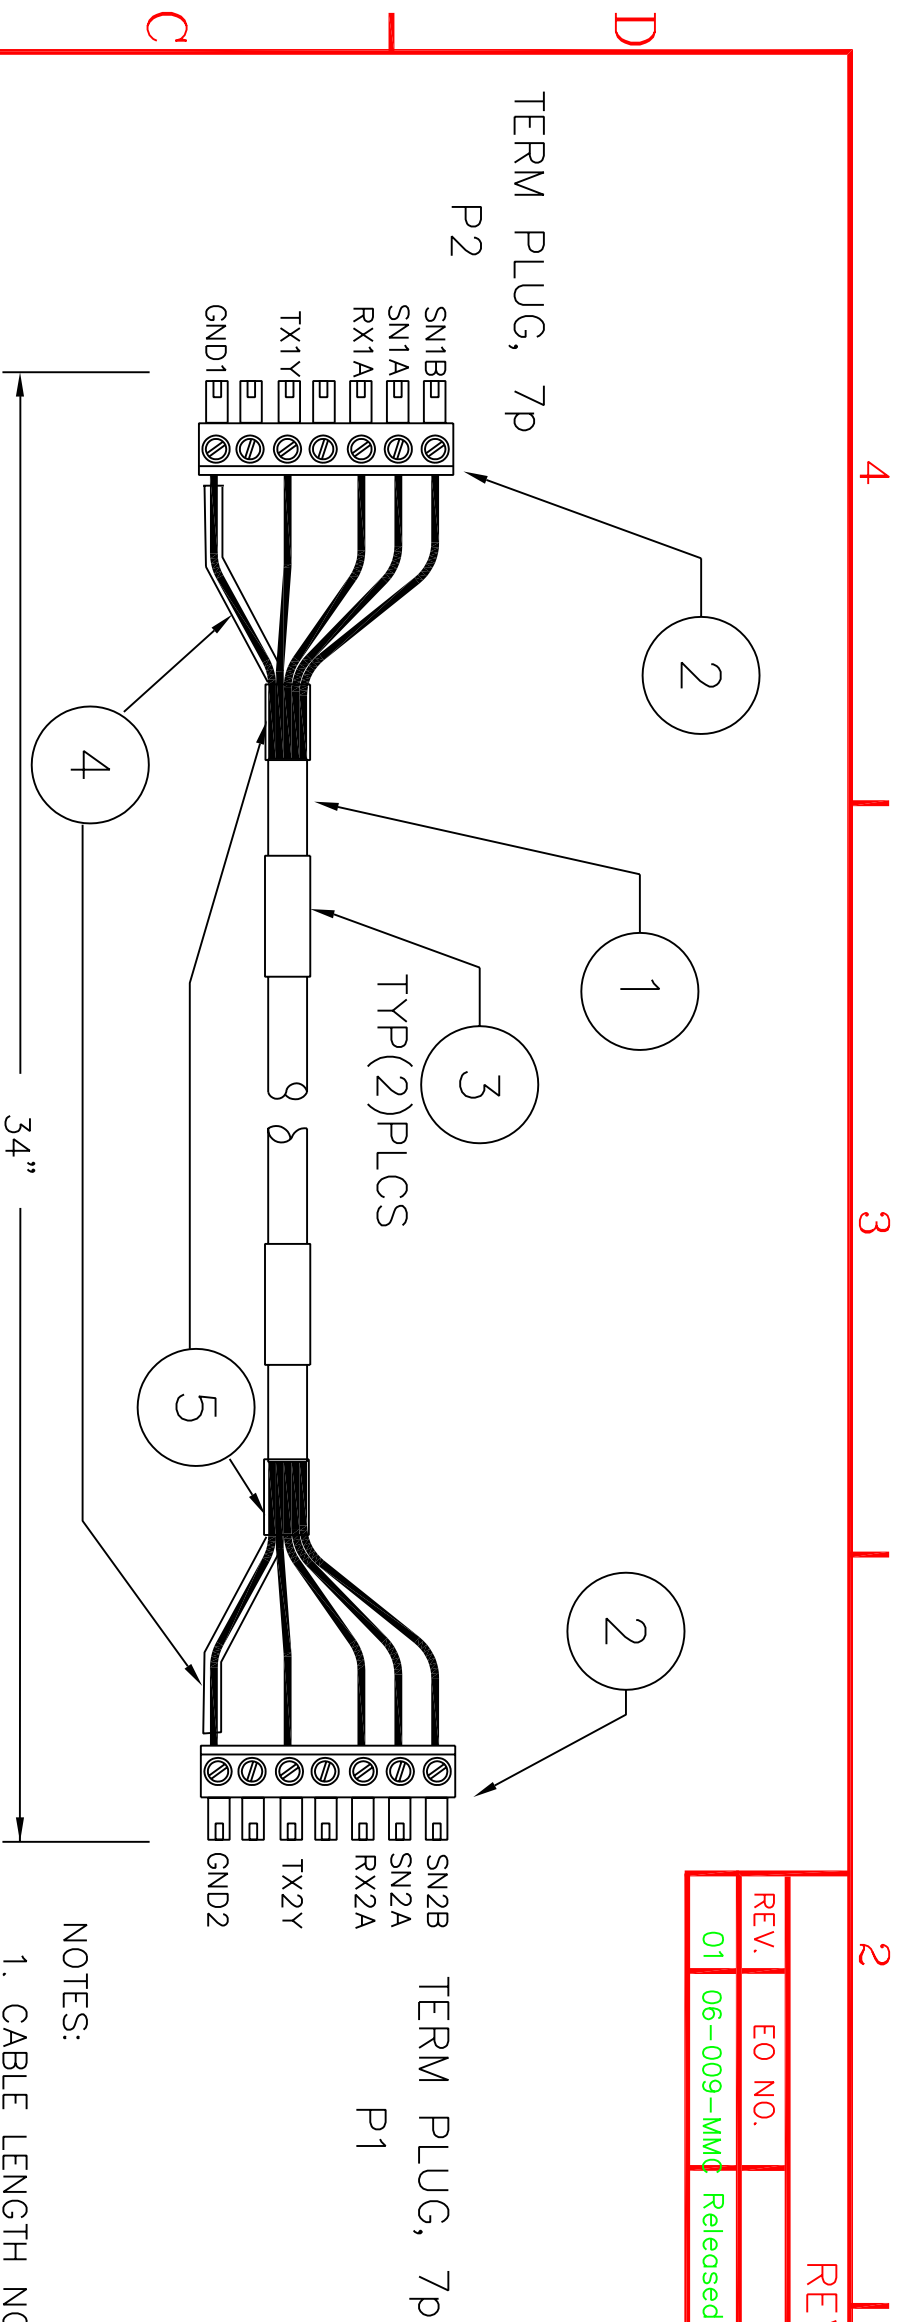


NOTES:

1. CABLE LENGTH NOT TO EXCEED 50 FEET.
2. STRIP 1/4" INSULATION FROM EACH WIRE AT P1 & P2 AND TIN EACH END PRIOR TO INSERTING INTO CONN.
3. APPLY SHIRINK TUBING TO SHIELD WIRE AND CABLE END
4. CONTINUITY TEST REQUIRED AFTER ASSY. QC STAMP ALSO REQUIRED.
5. CABLE LABEL TO REFLECT MR PART NUMBER.

PINNING CHART			
SIGNAL	COLOR	P1	P2
D OUT	WHT	RX2A	TX1Y
D IN	BLK	TX2Y	RX1A
GND	DRAIN	GND2	GND1
LATCH (-)	GRN	SN2A	SN1A
LATCH (+)	RED	SN2B	SN1B

SEE SEPARATE B.O.M.

REMOVE ALL BURRS AND BREAK ALL SHARP EDGES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCES ARE AS FOLLOWS FRACTIONS DECIMALS ANGLES $\pm 1/64$.XX $\pm .01$ $\pm 1/2^\circ$.XXX $\pm .005$	MATERIAL	DRAWN	DATE	TITLE CABLE ASSY, Mondo Frame Interconnect 
	FINISH	CHECKED	11-05	
PROPRIETARY TO MAGENTA RESEARCH LTD. NOT TO BE USED OR REPRODUCED FOR MANUFACTURING PURPOSES EXCEPT ON MAGENTA RESEARCH ORDER OR PRIOR TO WRITTEN CONSENT.	ENGR	APPVD	1/9/06	SIZE DRAWING NO. B 8450341-01
FILE	REF	REF	SCALE	DO NOT SCALE DRAWING SHEET 1 OF 1

4 3 2 1 4 3 2 1